

# JKP90BM/CM/WM

## GE® 27" Built-In Double Microwave/Thermal Wall Oven

### Dimensions and Installation Information (in inches)

KW Rating	
240V	6.4
208V	4.8
Breaker Size	
240V	30 Amps
208V	30 Amps

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


**Note:** if marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

**Note:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.**

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.


For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at [ge.com](http://ge.com) or call GE Answer Center® service, 800.626.2000.

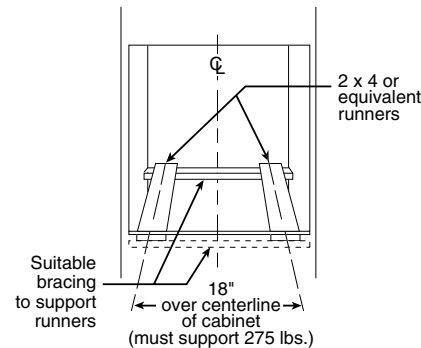

Cabinet		27"
A – Cabinet width required		27" min.
B – Minimum cabinet depth		23-5/8"
C – Opening width		25" min. - 25-1/4" max
D – Opening height		41-1/4" max
E – Minimum cutout location from floor		22"
Oven		
F – Overall depth*		23-5/8"
G – Overall height with trim		43" - 43-7/8"
	Overall height without trim	42-1/8"
H – Overall width		26-5/8"

\*Depth including door handle is approximately 26-7/10" min. to 26-8/10" max.

Recommended junction box locations. Locate junction box either 5" MIN. below cutout floor or 48" MIN. above cutout floor

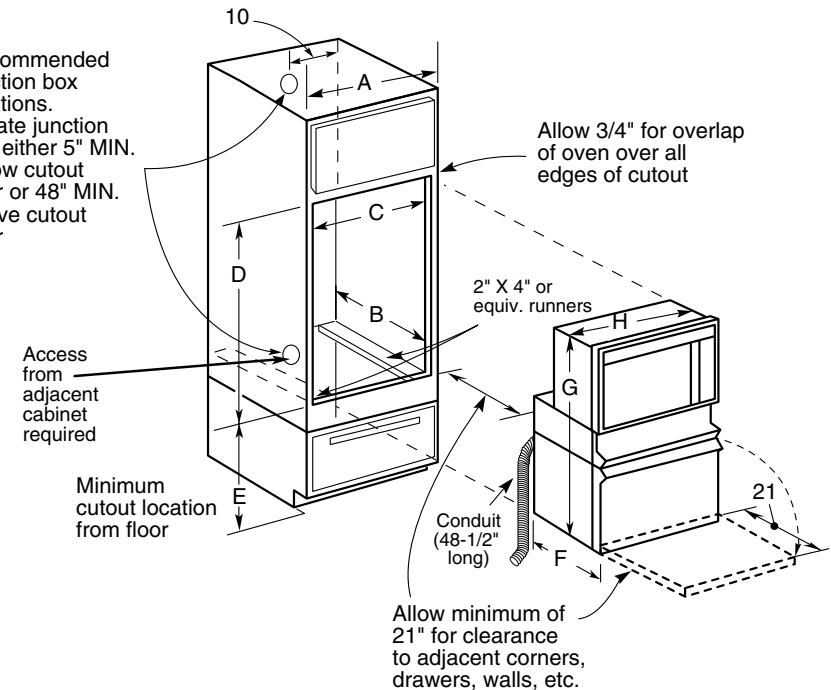

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories