## JTP90SM

## GE® 30" Built-In Double Microwave/Thermal Wall Oven

## Dimensions and Installation Information (in inches)

KW Rating		
240V	6.4	
208V	4.8	
Breaker Size		
240V	30 Amps	
208V	30 Amps	

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Suitable bracing to support runners


Suitable bracing to support runners

Suitable bracing to support 21-5/8"

of cabinet (must support 275 lbs.)

Cabinet	30"
A – Overlap of oven over side of edges of cutout	11/16"
B – Overlap of oven at top and bottom of cutout	1"
C – Overall of oven at top of cutout	1/2"
Oven	
D – Overall depth*	23-1/2"
E – Overall height with trim	44"
Overall height without trim	43-1/2"
E -Overall width	29-3/4"
*Depth including door handle is approximately 26-6/10" min. to	

\*Depth including door handle is approximately 26-6/10" min. to 26-9/10" max.

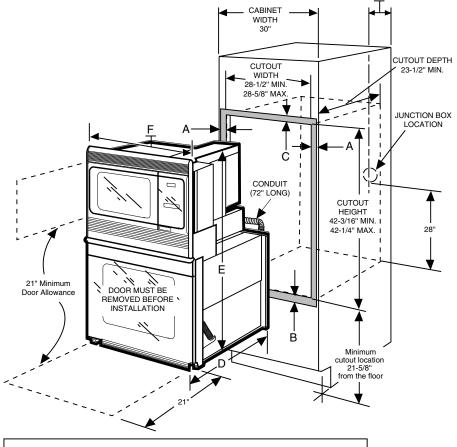

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT. THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



