
PSB2201NSS GE Profile Advantium[®] 240 Wall Oven

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: 2" minimum between cutouts when installed above warming drawer or single wall oven.


Installation Information: Before installing, consult installation instructions packed with product for current

dimensional data.

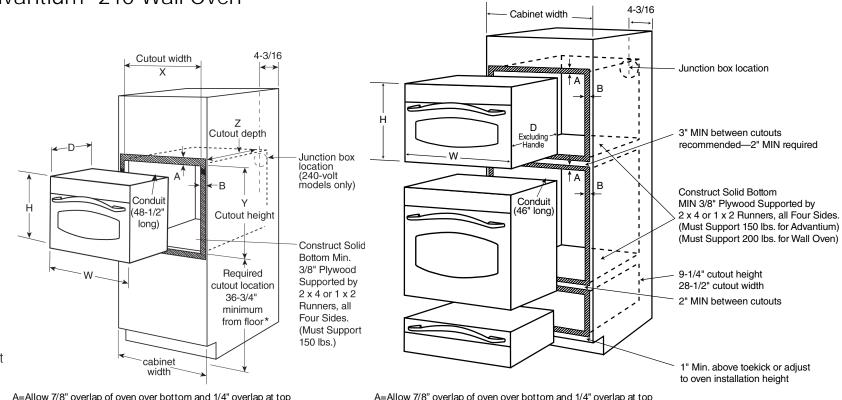

A=Allow 7/8" overlap of oven over bottom and 1/4" overlap at top edges of cutout. B=Allow 2-1/8" for overlap of oven over side edges of cutout.

For answers to your Monogram,[®] GE Profile[™] or GE[®] appliance questions, visit our website at ge.com or call GE Answer Center[®] service, 800.626.2000.



(Must support 130 lbs.)

2 6 5

er Center[®] service, bracing to support to support



imagination at work

A=Allow 7/8" overlap of oven over bottom and 1/4" overlap at top edges of cutout. B=Allow 2-1/8" for overlap of oven over side edges of cutout.

2 x 4's or equivalent solid floor		Cabinet Width (inches)	W Width	H Height	D Depth (excluding handle)	X Cutout Width	Y Cutout Height	Z Cutout Depth (minimum)
	PSB2200/1 without accessory drawer	30	29-25/32	19-1/8	21-1/2	25-1/8	17-1/2	23-1/2
	PSB2200/1 with accessory drawer	30	29-25/32	22-1/4	21-3/4	25-1/8 to 28-1/2*	21	23-1/2

*For existing cutouts a maximum width of 28-1/2" is acceptable

